Notes

1 Allow plus tolerance for clearance per ANSI A115.2.

2 Lock and latch case support by door manufacturer.

3 Plaster guard by door manufacturer

4 Prepare for a #8–32 screw.

5 Prepare for a #12–32 screw.

6 For 94K only! The 64K and 84K "C" style roses will not cover these holes.

7 For 64K only, a 1" latch face is available.

8 When a strike box is used, 9/64".

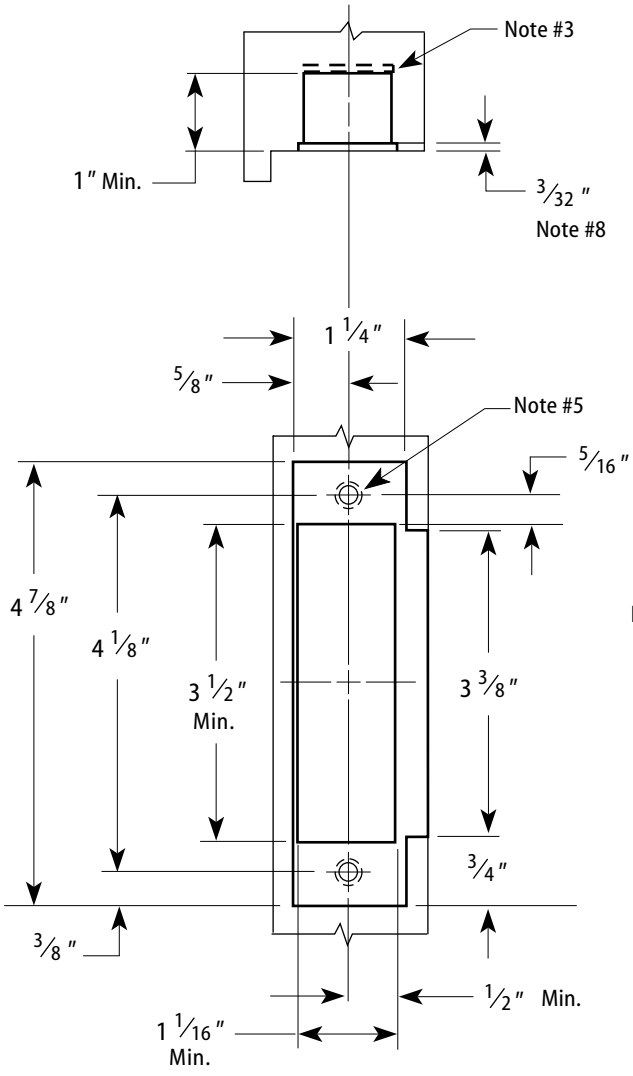

Frame Preparation

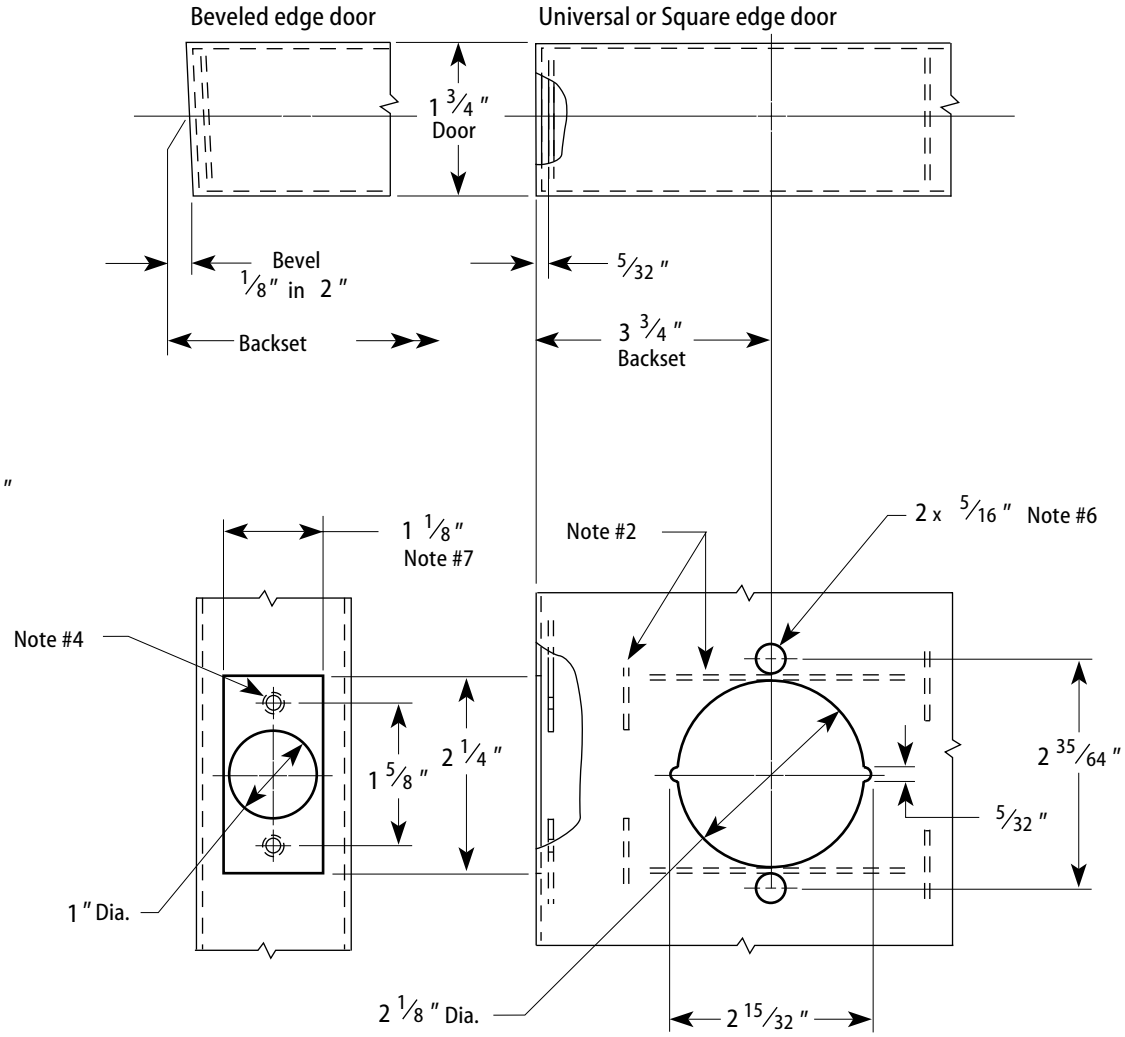

3 3/4 ″ Backset Door Preparation

Title: Door & Frame Preparation for 64K, 84K, & 94K Cylindrical Locks

Series: 64K, 84K, 94K

Backset: 3 3/4"

Strike: Large ANSI strike (S3)

Door thickness: 1 3/4"

Rev date: 06/1999

Template number: K11

Rev: D

BEST ACCESS SYSTEMS

T56055/Rev D 1797198 ER-7991-1